



Original scientific paper

DOI: 10.17508/CJFST.2021.13.1.08

Evaluation of Various Properties of Amaranthus (*Genus Amaranthus L.*) Based Composite Flour Blends for Preparation of Gluten-Free Biscuits

 MULUKEN K. KASSA^{1*}; SHIMELIS A. EMIRE²

¹Department of Chemical Engineering, Institute of Technology, Hawassa University, P.O.Box 05, Hawassa, Ethiopia

²Department of Food Engineering, School of Chemical and Bioengineering, Addis Ababa University, P.O.Box 33381, Addis Ababa, Ethiopia

ARTICLE INFO

Article history:

Received: February 24, 2020

Accepted: September 8, 2020

Keywords:

composite flours
gluten-free
amaranthus
sorghum
finger millet

ABSTRACT

This research was conducted to investigate the pasting, rheological and functional properties, and gluten-free biscuit making potential of a composite flour prepared from grains of amaranthus, sorghum and finger millet. The formulation for the composite flour was obtained from D-optimal mixture design ratio using Design-Expert®. The rheological and pasting properties of the composite flours were determined, while the proximate composition, physical dimensions, mineral concentration and sensory quality attributes of the biscuits were assessed. The results showed that there were significant ($P<0.05$) differences in the pasting profile of the control and amaranthus based composites flour except for pasting temperature. Water absorption capacity (WAC) and Water solubility index (WSI) increased as the blending ratio of amaranthus flour increased, whereas Oil absorption capacity (OAC) decreased. The Proximate composition evaluation 13.75, 2.04, 1.77 and 31.75% were found to be the highest values of the biscuit samples in terms of protein, crude fiber, ash and crude fat respectively. Mineral analysis was carried out and there was a significance ($P<0.05$) difference in Fe, Ca, Zn and P content among the biscuit samples made from the composite flour blends. Similarly, the sensory evaluation indicated there was a significance ($P<0.05$) difference in appearance, color, texture, flavor and overall acceptability among the composite biscuit samples. However, the difference was insignificant ($P<0.05$) in crispiness of biscuit sample. The study revealed that a nutritionally dense gluten-free biscuits can be formulated without adversely affecting the sensory attributes of the biscuit. Thus, the composite flours can be used for the preparation of gluten free food products in countries like Ethiopia, where the crops had not been optimally utilized.

Introduction*

Baking industry is considered as one of the major segments of food processing in the present days and because of their availability and reasonably good shelf life baked products are gaining popularity. Wheat is a major cereal grain used for preparation of many baked goods. However, most of these foods are poor in terms of nutritional quality (Omobolanle *et al.*, 2017). Baked products could be produced from cassava, sorghum, finger millet and other composite flours (Manley,

2000). A considerable attention has been given towards the development of baked goods with better nutritional quality.

Amaranth is a pseudo-cereal with high nutritional value, particularly for its balanced amino acid content, dietary fiber content and antioxidant activity. Its nutritional quality have attracted the attention of researches about the use of amaranth as functional ingredient (Cornejo *et al.*, 2019). Grain amaranth can be used as seeds or flour to make products such as cookies, biscuits, and other bakery products (Muyonga *et al.*, 2008). Besides its availability amaranthus can

*Corresponding author E-mail: mulek2015@gmail.com

also contribute to fighting malnutrition especially in developing countries like Ethiopia. Sorghum has been utilized in varies way in different part of Ethiopia and the grains are used in the preparation of porridge, infant food, and in preparation of local beverages etc (Belton and Taylor, 2002). But they are promising source of useful compounds because of their nutritional properties (Anonymous, 2016). In Ethiopia, finger millet is grown mainly as a sole crop in rotation with other annual crops, preferably legumes. Unleavened bread, thin-or thick porridge, fermented porridge, making “injera” are some of the different food types prepared from finger millet (Belton and Taylor, 2002). The grain's protein content (7.4 %) is comparable to that of rice (7.5 %). Finger millet is also a rich source of minerals (Desai *et al.*, 2010; Tsehay *et al.*, 2006).

Amaranth, sorghum, and finger millet, all are a gluten-free cereal grains and considered as better alternatives for those who have been suffering from celiac disease or (gluten – sensitive enteropathy), which is found to be a major problem with baked products from wheat, barley and rye. But, processing of these grains flour into baked products has several limitations since they lack these storage protein (gliadins and glutenin) which is responsible for gelatinization of flour and considered as one of the quality of baked products as it influence elasticity, chewiness etc. These characteristics of baked products mainly affected or influenced by the rheological and pasting properties of the flour (Adeyemi and Ogazi, 1985; Belton and Taylor, 2002). Therefore, this research work aimed at evaluating the rheological and pasting property of composite flours prepared from these grains and evaluate the nutritional quality and sensory acceptability of biscuit developed from their blends.

Materials and methods

Raw material

Amaranthus grain (*Amaranthus caudatus*) samples were purchased directly from a local market in Konso, Ethiopia. Finger millet (Whitey/Necho variety) and sorghum (Melkam Variety) samples were provided by Adet Agricultural Research Center and Melkassa Agricultural Research Centers of Ethiopia, respectively. The collected samples were transported to the laboratory in surface sterilized polythene bags. As described in figure 1, the grains were sorted, cleaned and washed to remove immature seeds, sand and soil and sun dried for 24 hours. Wheat flour was collected from KOJJ Food Processing PLC., Addis Ababa, Ethiopia and used as a control.

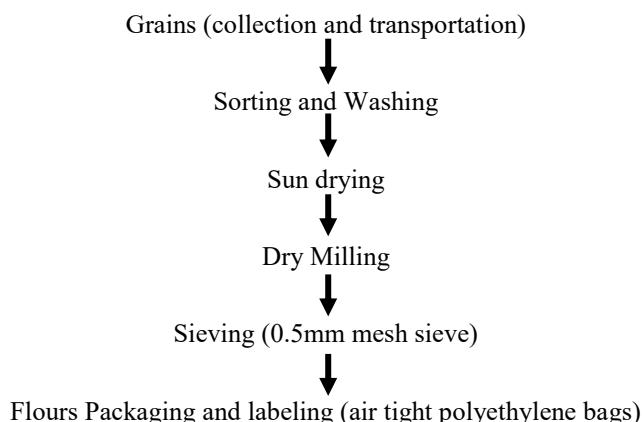


Fig 1. Flow chart for production of flour

All grains were made into flour by dry milling process using a laboratory mill 120, version 2.2; model MF 3170, Hagersten, Sweden with a mesh size of 0.5 mm (Fig. 1). The prepared flours were separately stored in a polyethylene bags at 20°C until further analysis. The composite flours were prepared by mixing amaranth flour with finger millet and sorghum flours at different level of ration. D-Optimal mixture ratio design was used to determine the optimum mixture formulation a 10-run constrained D-optimal mixture experiment was generated using Design-Expert®, version 6.0.8 based on the lower and upper limits provided. For the three components, the range of constrains were provided based on different literatures (Abdelghafor *et al.*, 2011; Schoenlechner *et al.*, 2006; Vijayakumar and Mohankumar, 2009). Constrained region in the simplex coordinate system was defined by the limits of $50 \leq X_1 \leq 100$, $0 \leq X_2 \leq 50$, $0 \leq X_3 \leq 20$, X_1 = Amaranths, X_2 = sorghum and X_3 = finger millet flour. A flour from wheat were used as a control i.e. 100% wheat flour (w/w on flour basis) with total runs in this experiment were 11 runs (refer Table 1.).

Biscuit Preparation Process

Biscuits were produced from the prepared composite flours using the standard AACC Method No.10.52 (AACC, 2000) and the baking process were as described by Karki *et al.* (2016). The dough was prepared in a laboratory manual dough mixer. Ingredients used for the preparation of biscuit samples like margarine, sugar, sodium bicarbonate, salt and ammonium bicarbonate were purchased from local market in Addis Ababa, Ethiopia and prepared prior to the baking process. The recipe for the formulation of gluten-free biscuit were presented in Table 2.

Table 1. D-optimal result for composite flour formulation

Run	Code	Component 1 A: Amaranth %	Component 2 B: Sorghum %	Component 3 C: Finger millet%
1	C-01	100.00	0.00	0.00
2	C-02	50.00	50.00	0.00
3	C-03	80.00	10.00	10.00
4	C-04	50.00	30.00	20.00
5	C-05	60.00	35.00	5.00
6	C-06	65.00	15.00	20.00
7	C-07	80.00	0.00	20.00
8	C-08	75.00	25.00	0.00
9	C-09	50.00	40.00	10.00
10	C-10	90.00	0.00	10.00

Table 2. Recipe for preparation of biscuit samples

Nº	Ingredients	Amount (g)
1	Total flour	200
2	Grinded sugar	75
3	Baking Soda/ Sodium bicarbonate	5
4	Ammonium bicarbonate	3
5	Table salt	3
6	Margarine/Shortening	100
7	Water	75ml

As shown in Fig. 2, all ingredients except flour and sodium bicarbonate were added with continued mixing during the preparation of dough from the composite flours and mixed more for about 10 min and the mixing process were continued till the mixture has turned to a homogenous creamy desired form. Then, the prepared composite flour and sodium bicarbonate were added to the dough and mixed continuously to form the final dough. Doughs were placed on a plate and a manual shaping machine was used to cut the dough to form a desired shapes and sizes. The shaped dough pieces were baked in baking oven at about 210 °C for 15 min and then allowed to cool, packed in Ziploc bags and stored prior to analysis.

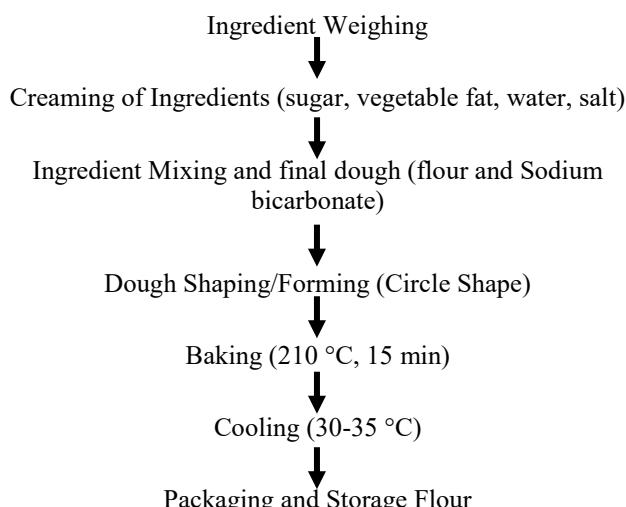


Fig 2. Flow chart for biscuit preparation Adapted from (Gallagher *et al.*, 2008; Kabuo *et al.*, 2018)

Chemical analysis

Determination of pasting and rheological properties of composite flours

Pasting property of composite flours were evaluated with Rapid Visco-Analyzer (RVA-4500) Perten instruments Pty. Ltd., Macquarie Park NSW, 2012, Australia according to method 76-21 of (AACC, 2000). Viscosity profile indices were recorded and obtained from a Thermocline for Windows (TCW) Version 3 software provided with the RVA as described by Amoo *et al.* (2014) & Bourekoua *et al.* (2016).

The effect of different flour levels on dough rheology was determined according to Brabender ICC BIPEA 300 by using the Brabender® Farinograph®-E, model 810130 USB/230V/50-60Hz, Duisburg, Germany and results obtained as graphic output (farinograms) from a computer software provided with the Brabender Farinograph.

Determination of functional properties of composite flours

Water absorption Capacity (WAC) of the samples were determined by using the method of Sulieman *et al.* (2019). The same procedure was repeated for oil absorption except that oil was used instead of water (Adebawale *et al.*, 2005). WAC and OAC were expressed as the weight of sediment/initial weight of flour sample (g/g). The method of Awolu *et al.* (2015) was used to determine water solubility index of the

flours. The swelling index (SI) was determined by using the method of Ezeocha and Okafor (2016) and expressed as the ratio of the final over the initial volume (mL/mL). The bulk density (BD) measurement was determined by measuring the material volume, which was compacted in a cylinder of 25 ml and the results were calculated as g/mL. The gluten content were determined according to the method of ICC (2000); standard No. 137/1 using perten gluten index®, version 1.0 E.N, Hagersten, Sweden, 2012.

Determination of proximate composition of composite flour blends and biscuit

The proximate composition of the flours and prepared biscuit samples were determined using the standard methods of AOAC (2000). The samples were analyzed for moisture, ash, crude fiber, crude protein, crude fat, and carbohydrates using the procedure described by AOAC (2000) method 925.09, 923.03, 962.09, 979.09 and 4.5.01, respectively. Determination of carbohydrate was carried out using estimation by difference. The heating value for the three groups of nutrients which provide the body energy was estimated in kJ by multiplying the percentage of crude protein, crude fat and carbohydrates by the energy values for gross nutrients conversion factors.

Determination of mineral composition of composite flour blends and biscuit

The analyses for essential minerals were carried out by using Atomic Absorption Spectrophotometric method. A sample of digest was used to determine some elements (calcium (Ca), iron (Fe) and Zinc (Zn) on the Atomic Absorption Spectrophotometer and Phosphorus (P) on flame photometry. The digestion of the sample and minerals was quantified according to AOAC (2000), method 985.35. Standard solutions and analytical curves were used for each element and the results were expressed in mg 100 g of the product on a dry – weight basis.

Determination of physical properties of biscuits samples

Physical properties of the biscuit samples were determined according to AOAC (2000). An Electronic Digital Caliper was used to determine the diameter (D) and thickness (T) of biscuit samples. The diameter of the samples were measured as average value of placing four biscuits edge to edge by using an electrical digital caliper having 0.05 mm accuracy. Thickness was also measured by taking the average of

stacking four biscuits on top of each other. Weight of biscuit samples was measured as average value of four individual biscuits with the help of an Electronic Analytical Balance (PASS, FA-2004, Germany) of 0.01g sensitivity.

The spread factor was determined by calculating the thickness and diameter of the prepared samples according to AOAC (2000) method 10-50D. Spread ratio was calculated by dividing the average value of diameter by average value of thickness of biscuits (Sulieman *et al.*, 2019).

Determination of colour dimension of biscuit samples

Color measurements, L* (lightness), a* (redness-greenness) and b* (yellowish-bluish), of the biscuit samples were carried out using a color measuring instrument Spectrophotometer (Model CM-600d, Konica Minolta, INC, Japan, 2012). The instrument was initially standardized ($L^*=90.29$, $a^*=1.37$, $b^*=0.06$) using a white reference standard (white duplicating paper sheet, 80g/m^2).

Determination of texture profile of biscuit samples

The texture profile of baked biscuit samples was determined using a texture analyzer (TA1 Series texture Analysis Machine (TA1SH-203V, AMETEK® Test and Calibration Instruments, LLOYD Materials Testing, 2016, England) according to AOAC (2000). Biscuit hardness was measured by means of a cutting-shear test using a stainless steel probe, which run perpendicular to the major dimension of the sample, placed on a slot surface (4 mm wide), at a constant speed of 2 mm/s. The maximum force (N) required to shear the sample was taken as a measure of hardness; the distance at the maximum force was also recorded. All measurements were carried out in triplicate.

Sensory evaluation of biscuit samples

The evaluation and testing preferences of the baked biscuit samples were analyzed by a panel of twenty (20) semi-trained panelists randomly selected from Addis Ababa Science and Technology University. The panelists were from both sexes, and from different ages, they were requested to taste each sample separately without comparing it with another sample. Sensory evaluation was performed 24 hours after baking using a 9-hedonic scale of points, where 1 corresponds to the statements "I dislike it extremely" and 9 corresponds to "I like it extremely." The samples were evaluated for desirability for appearance, color, taste, crispness, flavor, texture, and overall acceptability of the baked samples. Coded product

samples were arranged in a random order on white plates and served to the panelists. The panelists were given a 20 min orientation about the procedure of sensory evaluation. Potable water was provided to rinse the mouth between evaluations and covered cups was also provided when panelists wouldn't wish to swallow the samples.

Experimental design and statistical analysis

The analyses were designed to use replication techniques for each treatment and determined by triplicate. Each treatment was repeated a number of times (three) to obtain a valid and more reliable estimate than which is possible with one observation only. The composite flours were formulated based on a constrained mixture D-optimal design using Design-Expert®, version 6.0.8 (Stat-Ease, Inc. 2021 East Hennepin Ave., Suite 480 Minneapolis, USA, 2002). For statistical analysis, means and standard deviation (SD) were calculated using SPSS statistical software. One way Analysis of Variance (ANOVA) were used for data analysis with a significance difference of ($p<0.05$) for comparison of means.

Result and discussion

Pasting properties of a composite flours

Viscosity profile or pasting properties of the composite flour sample indices are presented in Table 3. There were no significant ($P<0.05$) differences in pasting temperatures between various treatments of composite flours and the control wheat flour, but in general the pasting temperature in composite flours

were lower than that of the control (100% wheat flour), which shows the gluten in wheat flour held more water, so that some of the water is not available for starch which resulted in reduction of gelatinization. The reduced gelatinization temperature indicates the better availability of starch to amylolysis enzymes during baking process which is desirable in baked products like bread but not that significant for biscuit (Dautant *et al.*, 2007).

The results of the pasting characteristics indicated that the higher level of finger millet flour increased the peak viscosity (PV), break down viscosity (BDV), and setback Ratio (SBR) of composite flours. This is due to the reduced presence and interaction of components like fat and protein from finger millet starch that increase the viscosity (Dautant *et al.*, 2007). There were a change in the pasting profile of the composite flours compared with its 100% flour. It was found that the PV decreased as finger millet flour was decreased, but the ratio of sorghum flour and amaranth flour only had a little effect on peak viscosity of composite flours and there were a significance ($P<0.05$) difference among the composite flours. According to Morris *et al.* (1997), the differences in the starch and protein composition of composite flours could affect pasting viscosity and properties.

The lower BDV were found in composite flours, as compared with the control wheat flour with lowest (874cP) and highest (2157cP) BDV exhibited for C-01 and 100% SF flour respectively showing a significance ($P<0.05$) difference amon the composite flour blends. The BDV also decreases as increase in amaranthus flour. It can be regarded with the susceptibility of protein to heat damage in amaranthus flour.

Table 3. Pasting properties (Rapid Visco-Analyser parameters) of composite flour blends

Samples	Pasting Property (RVA) Parameters						
	PV (cP)	TV (cP)	BDV (cP)	FV (cP)	SBR	PT (min)	P _{Temp} (°C)
100% SF ^a	3040	1962	1078	7184	5222	5.33	75.98
100% FMF	3939	1782	2157	4468	2686	5.60	76.42
100% WF	2648	1253	1395	3626	2373	5.40	78.56
C-01	1967	1093	874	1639	546	5.49	76.20
C-02	2199	1224	975	2344	1120	4.67	79.20
C-03	2249	1146	1103	1885	739	4.33	76.75
C-04	2305	1094	1211	2329	1235	5.01	78.80
C-05	2265	1212	1053	2174	962	4.60	78.30
C-06	2398	1067	1331	2022	955	4.47	76.75
C-07	2432	1116	1316	1941	825	4.33	75.90
C-08	2090	1129	961	1946	817	4.47	78.30
C-09	2391	1177	1214	2422	1245	4.96	77.45
C-10	2107	1091	1016	1718	627	5.04	76.65

^a100%SF: 100% Sorghum Flour, 100%FMF: 100% Finger Millet Flour, 100%WF: 100% Wheat Flour, samples coded with C-01 up to C-10: are composite flours obtained from D-optimal result for composite flour formulation and preparation of biscuit samples accordingly as presented in table 1; PV = Peak Viscosity, BDV = Breakdown Viscosity, TV = Trough Viscosity, SBR = setback ratio, FV = Final Viscosity, PT = Peak Time and P_{Temp} = Pasting temperature.

Table 4. Rheological property (Farinographic characteristic) of composite flour blends

Sample Codes	Farinographic characteristics						
	C (FU)	WA (%)	DDT (min)	S (min)	DS (FU)	DS (FU), ICC	FQN
100% SF ^a	119	50.5	1.0	0.8	71	42	17
100% FMF	327	55.7	2.5	1.8	68	174	25
100% WF	482	55.6	2.3	0.9	88	109	27
C-01	946	67.2	1.2	0.2	389	33	13
C-02	612	58.8	1.8	1.7	183	192	20
C-03	674	60.4	2.2	1.3	155	177	22
C-04	303	55.1	1.9	1.3	177	187	20
C-05	381	57	1.5	1.2	153	151	16
C-06	579	62	3.4	2.1	181	188	26
C-07	617	62.8	2.2	0.6	266	277	22
C-08	786	67.2	2.5	0.6	324	306	27
C-09	491	59.8	2.4	0.9	200	193	23
C-10	952	71.3	1.7	1.4	379	383	21

^a100%SF: 100% Sorghum Flour, 100%FMF: 100% Finger Millet Flour, 100%WF: 100% Wheat Flour and samples coded with C-01 up to C-10 are composite flours obtained from D-optimal result for composite flour formulation and preparation of biscuit samples accordingly as presented in table 1. C = Consistency, WA = Water Absorption, DDT = Development Time, S = Dough Stability, DS = Degree of Softening, FQN = Farinographic Quality Number.

Generally, the lower BDV and FV as increase in amaranth flour indicate the ability of the flour to form a viscous paste or gel after cooking and cooling as well as the resistance of the paste to shear stress during stirring (Lee *et al.*, 2012). Composite flours showed significantly ($P < 0.05$) lower setback ratio than that of wheat flour except for 100%SF which obtained the highest (5222). The blending gave the flours a longer paste peak times, and hence the starch granules swelled gradually and had better resistant to mechanical damage.

Rheological properties of a composite dough blends

The results obtained from farinograph characteristics for dough made from a composite flours are presented in Table 4. Doughs consistence for composite flours (303-786 FU) showed a significance ($P < 0.05$) difference and decreased comparing to the 100% flours but close (± 100 FU) to the desired consistence mostly 500 FU for wheat, which exhibited 482 FU. The decrease in consistency of the flours may be due to the availability of bound water that occur as a result of the absence of gluten proteins in the flours and the action of enzymes (protease and α -amylase) on the dough components (Vizitiu *et al.*, 2012).

The water absorption at a given 14% moisture content had shown a significant ($P < 0.05$) difference between the composite flours as compared to the control wheat flour since there were increased amount of water absorption was experienced in the composite flour (55.1 - 71.3%) while the control wheat flour exhibited a water absorption of (55.6%). Sample C-10 had absorbed a higher amount of water (71.3%) while 100%SF flour absorbed the lowest amount of water (50.5%).

Dough development time (DDT) reflects the time between the first addition of water and the time when the dough seems to have optimum elastic and viscous properties for the retention of gas (Vizitiu *et al.*, 2012). In this case, sorghum flour exhibited the minimum (1.0 min) time and sample C-06 had the maximum (3.4 min). Compositing the flours had shown a significance ($P < 0.05$) difference and an increase in DDT and which has a positive effect in doughs quality. Doughs stability for the composite flours was ranged between the lowest (0.2 min) for raw amaranth flour and highest (1.8 min) for 100% finger millet flour. Finger millet flour showed the better stability for mixing which resulted in an increase in stability for the composite flours contains a higher amount of it (Miralbes, 2004). Minimum stability were obtained for most of the composite flours that differ significantly ($P < 0.05$) from the control wheat flour. But there were an improvement in dough stability as the increased amount of finger millet flour in the composite flours which is similar with the findings of Vijayakumar and Mohankumar (2009).

Degree of softening (DS) parameter had ranged between 33 and 383 FU for raw amaranth flour and sample C-10, respectively. The values for DS showed a significance ($P < 0.05$) difference among the composite flour blends. Raw amaranth flour and sample C-08 exhibited the lowest (13) and highest (27) FQN respectively resulting in a significance ($P < 0.05$) difference among the composite flour blends. The study showed that amaranth flour is a weak flour and not able to stay long without breaking while sorghum and finger millet flour had a better quality in terms of FQN.

Table 5. Functional properties of composite flour blends

Samples	Parameters						
	BD (g/mL)	WAC (g/g)	OAC (g/g)	SI (mL/mL)	SP (g/g)	WSI (g/g)	WGC (%)
100% SF ^a	0.61 ±0.8 ^b	2.27 ±0.8 ^b	1.40 ±0.2 ^a	5.63 ±0.1 ^{bc}	5.89 ±0.8 ^b	0.06 ±0.7 ^b	Nil
100% FMF	0.59 ±0.6 ^c	2.32 ±0.2 ^{ab}	1.32 ±0.2 ^a	5.75 ±0.4 ^c	4.77 ±0.5 ^d	0.20 ±0.7 ^c	Nil
100% WF	0.57 ±0.9 ^d	1.78 ±0.4 ^c	1.09 ±0.2 ^b	4.75 ±0.67 ^a	7.05 ±0.6 ^{ab}	0.14 ±0.2 ^{ab}	31.5 ± 0.14 ^a
C-01	0.87 ± 0.7 ^a	2.38 ±0.2 ^a	1.39 ±0.2 ^a	4.40 ±0.6 ^a	8.03 ±0.5 ^a	0.18 ±0.8 ^a	Nil
C-02	0.57 ±0.9 ^c	2.32 ±0.7 ^{ab}	1.21 ±0.2 ^a	5.59 ±0.1 ^c	4.51 ±0.6 ^d	0.23 ±0.1 ^c	-
C-03	0.58 ±0.7 ^c	2.33 ±0.9 ^{ab}	1.28 ±0.2 ^a	4.80 ±0.7 ^a	6.48 ±0.4 ^{ab}	0.18 ±0.6 ^a	-
C-04	0.58 ±0.8 ^c	2.45 ±0.7 ^{ab}	1.31 ±0.2 ^a	4.27 ±0.2 ^a	4.56 ±0.7 ^d	0.20 ±0.8 ^c	-
C-05	0.57 ±0.2 ^c	2.68 ±0.4 ^{ab}	1.21 ±0.2 ^a	3.92 ±0.4 ^d	5.72 ±0.9 ^{bc}	0.22 ±0.2 ^c	-
C-06	0.57 ±0.5 ^c	2.47 ±0.3 ^{ab}	1.30 ±0.2 ^a	3.60 ±0.3 ^d	5.27 ±0.7 ^c	0.23 ±0.1 ^c	-
C-07	0.57 ±0.1 ^c	2.56 ±0.2 ^{ab}	1.78 ±0.2 ^c	3.96 ±0.4 ^d	7.37 ±0.6 ^{ab}	0.17 ±0.3 ^a	-
C-08	0.57 ±0.1 ^c	2.48 ±0.7 ^{ab}	0.98 ±0.2 ^a	3.79 ±0.6 ^d	6.44 ±0.9 ^e	0.29 ±0.9 ^c	-
C-09	0.64 ±0.6 ^d	2.45 ±0.9 ^{ab}	1.32 ±0.2 ^a	4.08 ±0.5 ^d	4.72 ±0.9 ^d	0.17 ±0.5 ^a	-
C-10	0.58 ±0.9 ^b	2.48 ±0.1 ^{ab}	1.02 ±0.2 ^b	3.91 ±0.4 ^d	5.39 ±0.3 ^{bc}	0.11 ±0.3 ^{ab}	-

^{a-d}100%SF: 100% Sorghum Flour, 100%FMF: 100% Finger Millet Flour, 100%WF: 100% Wheat Flour; samples coded with C-01 up to C-10: are composite flours obtained from D-optimal result for composite flour formulation and preparation of biscuit samples accordingly as presented in table 1.

^{a-d}All data are means of three replicates ± SD. Means with the same superscripts in a column do not differ significantly ($P < 0.05$) among the composite flours.

Functional properties of composite flours

The functional property evaluations of the composite flours were presented in Table 5. There were a significant ($P < 0.05$) difference among them with a range of 0.57-0.87g/mL, 1.78-2.68g/g, 0.98-1.78g/g, 3.60-5.75mL/mL, 4.52 up to 8.03 g/g and 0.02-0.29g/g for bulk density (BD), water absorption capacity (WAC), oil absorption capacity (OAC), swelling index (SI), swelling power (g/g) and water solubility index (WSI) respectively.

The BD ranged between 0.57 and 0.87 g/mL and the control wheat flour exhibited the lowest along with some of the composite flours with C-01 had the highest BD value. There were no significance ($P < 0.05$) difference among the composite flour blends and the higher BD of the composite flours demonstrated greater compactness and possible mixed effect caused by the interaction of the molecules of the composite flours. The higher BD observed for C-01 (0.87g/mL) implies that a solid, thick and compact packaging material may be required for this product as bulk density can influence the selection of packaging materials which relates to the sample particle size (Adeleke and Odedeji, 2010).

The WAC varied between 1.78 and 2.68g water/g flour. The control wheat flour (100%WF) had the lowest (1.78g water/g flour) and sample C-05 had the highest (2.68g/g) WAC than the rest of the composite flours blends showing no significance ($P < 0.05$) difference. The variations of the composite flours in particle size distribution may have influenced the WAC for the composite flours. According to Abu *et al.* (2006) the physical entrapment of oil within the flour starch structures significantly influences the oil absorption in flours starch as it is not able to possess nonpolar sites as compared to those flour components found in proteins.

The composite flour had a better OAC with sample C-10 exhibited the lowest (0.98g oil/g flour) and C-07 had the highest (1.78 g oil/g flour). According to Taiwo *et al.* (2017) the effect of OAC can be seen at the storage ability of a flour sample which is very important to take in to consideration to develop a new food product as it can have an influence on the shelf life stability of the products. Thus, the biscuit samples prepared from the composite flours could have a relatively lower shelf life as compared to the control.

There were a significant ($P < 0.05$) differences in SP among the composite flours and the control wheat flour. The swelling power of composite flour blends ranged from 4.52 up to 8.03 g/g. C-01 had the highest SP while C-02 had the lowest value. The increased amount of amaranthus flour had increased the swelling power in composite flours. As Carcea and Acquistucci (1997) indicated, the water absorption of the starch granules in the flour could be influenced in SP/SI capacity of the flours. The wet gluten content (WGC) determination were resulted nil for 100% grain flours and composite flour blends while the control exhibited (31.48%) and this result is comparably the same with the result of Thorat and Ramachandran (2016). This proves that the grains used in this study are gluten free.

Proximate and mineral composition of composite flour blends and biscuit samples

Proximate Composition

As Table 6 shows, the proximate composition of biscuit samples produced from the composite flours varied significantly ($P < 0.05$) with a range of 2.22-10.43%, 6.65-10.85%, 1.89-3.4%, 28.62-37.75%, 1.40-1.73% and 46.90-57.23% for moisture, protein, crude fibre,

crude fat, ash and carbohydrate respectively. There were no significant ($P < 0.05$) difference in the moisture content of the prepared biscuit samples. The moisture content of the biscuit samples were significantly lower comparing to the required moisture content for such products (<10%), which can result in a better shelf life and reduced effect on the quality attributes of the product. The protein content varies significantly ($P < 0.05$) among the biscuit samples with sample C-01 had the highest (13.75%) and while the control sample had the lowest (7.01%). All the formulated biscuit samples had higher protein content than the control, which is close and conformed to the minimum FAO/ WHO recommended value of 10%. The protein content of the samples had shown an increase as the proportional amount of amaranth (18.90%) and sorghum (11.73%) flour increased, which is comparably the same with the result of Belton and Taylor (2002) and Sousa *et al.* (2014). The fiber, contents of the biscuit samples were significantly ($P < 0.05$) differ but the values were well within the recommended range (5g/100g), of FAO/WHO. The carbohydrate content of biscuit samples increased with addition of finger millet flour. This may be due to higher carbohydrate content in finger millet than in amaranthus and sorghum flour, which conforms with the results of Sousa *et al.* (2014) and Suma *et al.* (2014).

Mineral analysis

Ready to eat foods like biscuits have a potential to fulfill the recommended dietary allowance (RDA)

(600-1200 mg/ 100g) for minerals with a significantly lower consumption comparing to other kinds of foods. This is found to be most importantly necessary for those who are vulnerable to malnutrition and deficient with minerals. Most of the biscuit samples prepared from the composite flour blends had significantly ($P < 0.05$) higher iron content than the control (16.88 mg/100g). The iron content ranged between 14.21 to 23.21 mg/100g for the prepared biscuit samples as presented in Table 7. However, there were a significant ($P < 0.05$) difference in the zinc content of biscuit samples and it ranged from 2.44 to 3.60 mg/100g, sample C-08 obtained the highest value. Phosphorus resulted in a significant ($P < 0.05$) difference between the composite and control wheat flour. It ranged from 252.76 to 277.39 mg/100g for biscuit samples prepared from the composite flours and the increased amount of finger millet in the composite flours resulted better in phosphorous content. Biscuit samples prepared from the composite flour had a significant ($P < 0.05$) difference as compared to the control in terms of calcium content. Sample C-03 exhibited the highest 27.54 mg/100g and the sample C-09 (15.65 g/100g) had the lowest mineral value for calcium. The results showed that biscuit samples prepared from composite flours has shown a better results in terms of mineral content and conforms with the findings of Belton and Taylor (2002).

Table 6. Proximate analysis of raw flour blends and baked biscuit samples (dry basis)

Sample	Chemical Composition						
	Moisture Content (%)	Crude Protein (%)	Crude Fiber (%)	Crude Fat (%)	Ash (%)	CHO (%)	Energy Value (Kcal/100gm)
100%AF ^a	9.38 ± 0.21 ^a	18.90 ± 0.02 ^a	2.22 ± 0.03 ^a	6.87 ± 0.15 ^a	1.66 ± 0.04 ^a	60.97 ± 0.92 ^a	381.87 ± 0.48 ^a
100%SF	9.58 ± 0.75 ^{ab}	11.73 ± 0.04 ^c	2.48 ± 0.1 ^b	3.00 ± 0.31 ^{bc}	1.64 ± 0.12 ^a	71.57 ± 1.03 ^{ab}	360.20 ± 0.97 ^{ab}
100%FMF	10.01 ± 0.25 ^b	8.23 ± 0.01 ^{de}	2.23 ± 0.02 ^a	2.37 ± 0.03 ^b	1.72 ± 0.01 ^{ab}	75.44 ± 0.67 ^b	354.25 ± 1.04 ^b
100%WF	10.43 ± 0.31 ^b	10.75 ± 0.01 ^{bc}	1.80 ± 0.02 ^d	3.54 ± 0.21 ^c	0.62 ± 0.02 ^c	72.86 ± 0.59 ^{ab}	366.30 ± 1.25 ^{ab}
C-00	2.79 ± 0.13 ^c	7.01 ± 0.16 ^g	1.31 ± 0.15 ^c	31.50 ± 0.30 ^{de}	1.77 ± 0.02 ^b	55.62 ± 0.95 ^c	534.02 ± 0.87 ^c
C-01	2.60 ± 0.14 ^c	13.75 ± 0.12 ^e	1.91 ± 0.21 ^{de}	28.75 ± 0.45 ^{de}	1.59 ± 0.10 ^e	51.40 ± 1.32 ^{cd}	519.35 ± 0.56 ^d
C-02	3.41 ± 0.14 ^d	10.83 ± 0.03 ^f	2.18 ± 0.04 ^{ab}	28.62 ± 0.35 ^d	1.63 ± 0.06 ^a	53.33 ± 0.47 ^{cd}	514.22 ± 0.99 ^d
C-03	3.21 ± 0.15 ^d	11.05 ± 0.14 ^d	1.69 ± 0.08 ^{cd}	31.75 ± 0.41 ^e	1.40 ± 0.01 ^d	50.90 ± 0.86 ^d	533.55 ± 0.93 ^e
C-04	2.42 ± 0.05 ^c	9.65 ± 0.03 ^f		31.25 ± 0.10 ^{de}	1.73 ± 0.11 ^{ab}	53.38 ± 1.09 ^{cd}	533.37 ± 0.05 ^e
C-05	2.22 ± 0.03 ^c	10.05 ± 0.02 ^d	1.89 ± 0.70 ^{cd}	30.75 ± 0.10 ^{de}	1.69 ± 0.02 ^a	53.40 ± 1.23 ^{cd}	530.55 ± 1.05 ^e
C-06	2.81 ± 0.01 ^c	10.77 ± 0.01 ^{bc}	1.78 ± 0.15 ^{cd}	29.62 ± 0.23 ^{de}	1.57 ± 0.08 ^e	53.45 ± 0.68 ^{cd}	523.46 ± 0.08 ^{de}
C-07	3.22 ± 0.01 ^d	9.80 ± 0.12 ^b	2.04 ± 0.01 ^e	30.75 ± 0.08 ^{de}	1.73 ± 0.04 ^{ab}	52.46 ± 0.87 ^{cd}	525.79 ± 0.97 ^{de}
C-08	2.81 ± 0.04 ^c	9.40 ± 0.16 ^{de}	1.38 ± 0.07 ^{cd}	29.75 ± 0.25 ^{de}	1.63 ± 0.07 ^{aa}	55.03 ± 0.12 ^{cd}	525.47 ± 0.67 ^{de}
C-09	2.62 ± 0.12 ^c	10.85 ± 0.04 ^{bc}	1.46 ± 0.04 ^{cd}	30.25 ± 0.17 ^{de}	1.71 ± 0.1 ^{ab}	53.11 ± 1.04 ^{cd}	528.09 ± 0.85 ^{de}
C-10	3.21 ± 0.01 ^d	9.81 ± 0.06 ^{bc}	1.95 ± 0.13 ^{de}	30.75 ± 0.03 ^{de}	1.72 ± 0.01 ^{ab}	52.56 ± 0.85 ^{cd}	526.23 ± 0.49 ^{de}

^a100%AF: 100% Amaranth Flour, 100%SF: 100% Sorghum Flour, 100%FMF: 100% Finger Millet Flour, 100%WF: 100% Wheat Flour and C-00: biscuit prepared from 100% wheat flour as a control. Samples coded with C-01 up to C-10. Represents the biscuit samples prepared from composite flour blends which was developed by using D-optimal Design as presented in Table 1. a-e All data are means of three replicates ± SD. Means with the same superscripts in a column do not differ significantly ($P < 0.05$).

Table 7. Mineral analysis of raw flour blends and baked biscuit samples (dry basis)

Samples	Mineral Composition (mg/100g)			
	Fe	Zn	P	Ca
100%AF	13.96 ± 0.98 ^a	2.67 ± 0.23 ^a	273.80 ± 0.52 ^a	25.53 ± 0.74 ^a
100%SF	24.19 ± 0.42 ^b	2.73 ± 0.35 ^a	283.03 ± 0.32 ^a	24.16 ± 1.04 ^a
100%FMF	22.97 ± 0.38 ^b	3.05 ± 0.85 ^b	281.01 ± 0.47 ^a	24.93 ± 1.25 ^a
100%WF	10.96 ± 0.15 ^a	3.74 ± 1.02 ^b	34.56 ± 0.65 ^b	57.19 ± 0.63 ^b
C-00	16.88 ± 1.04 ^c	2.92 ± 1.09 ^a	26.87 ± 0.74 ^b	22.71 ± 0.54 ^a
C-01	18.14 ± 2.14 ^c	2.86 ± 0.94 ^a	252.76 ± 0.68 ^c	18.84 ± 0.41 ^c
C-02	17.62 ± 0.90 ^c	2.44 ± 1.21 ^a	269.77 ± 0.64 ^c	12.75 ± 0.30 ^c
C-03	16.41 ± 1.05 ^c	2.82 ± 1.41 ^a	255.65 ± 0.91 ^c	27.54 ± 1.25 ^a
C-04	20.05 ± 0.68 ^{bc}	2.69 ± 0.56 ^a	261.70 ± 1.02 ^c	20.20 ± 1.42 ^{ac}
C-05	19.15 ± 0.26 ^{bc}	2.71 ± 0.32 ^a	277.39 ± 0.54 ^a	25.02 ± 0.57 ^a
C-06	17.29 ± 0.87 ^c	2.75 ± 0.47 ^a	276.63 ± 0.97 ^a	25.20 ± 1.36 ^a
C-07	23.21 ± 1.42 ^b	2.49 ± 0.36 ^a	260.84 ± 1.03 ^c	22.32 ± 0.74 ^{ac}
C-08	15.79 ± 1.03 ^a	2.68 ± 0.85 ^a	276.11 ± 0.92 ^a	26.46 ± 0.95 ^a
C-09	14.21 ± 0.45 ^a	2.60 ± 0.96 ^a	260.55 ± 0.90 ^c	15.65 ± 1.45 ^c
C-10	14.86 ± 0.91 ^a	2.70 ± 1.03 ^a	274.52 ± 0.46 ^a	16.5 ± 0.85 ^a

^a100%AF: 100% Amaranth Flour, 100%SF: 100% Sorghum Flour, 100%FMF: 100% Finger Millet Flour, 100%WF: 100% Wheat Flour and C-00: biscuit prepared from 100% wheat flour as a control. Samples coded with C-01 up to C-10. Represents the biscuit samples prepared from composite flour blends which was developed by using D-optimal Design as presented in Table 1.

^{a-c}All data are means of three replicates ± SD. Means with the same superscripts in a column do not differ significantly ($P < 0.05$).

Physical properties of biscuit samples

The physical characteristics of biscuit samples prepared from composite flour, as well as a control (100% wheat flour) is presented in Table 8. The diameter (D), thickness (T) and weight (W) of biscuit samples were ranged from 51.48 to 62.00 mm, 8.43 to 11.95 mm and 11.12 to 11.87 g, respectively. In terms of D there were a significant ($P < 0.05$) difference among the biscuit samples. While there were no significant ($P < 0.05$) differences in biscuit W.

The result showed that as level of sorghum flour increases, the decrease in biscuit T was more remarkable and the increase in finger millet reduced the W and T of biscuit samples. According to Ragae and Abdel-Aal (2006), T is affected by the quantity and quality of protein in the flour whereas weight is basically determined by the quantity of dough baked and the amount of moisture and carbon dioxide diffused out of the biscuit during baking. It was observed that the biscuit samples prepared from the composite flour had a relatively higher weight, which is may be due to low retention of carbon dioxide gas in the blended dough, hence providing dense biscuit texture (Haridas Rao and Malini Rao, 1991).

The spread factor (SF), which is the ratio of D and T, has been generally adopted as a more reliable measure of biscuit size (Shittu *et al.*, 2007) and it ranged from 5.01 to 6.28. Comparing to the control sample most of the biscuit samples formulated from the composite flour exhibited a lower water activity (a_w) (Table 8). It could be associated with the higher WAC of the wheat

flours (Table 5). According to Labuza *et al.* (1972) reducing a_w below 0.7 prevents microbial spoilage and to successfully preserve a food product, water activity would have to be lowered to a range where the rate of deteriorative reactions is minimized.

The maximum force (hardness) required to break the biscuit sample was recorded along with the thickness where this maximum force applied is presented in Table 8. The texture analysis showed a higher firmness as it was required a relatively higher force in biscuit made from composite flours when compared with biscuit made from a control with a confidence level ($P < 0.05$).

The color of the biscuit samples was related to the color of the corresponding grain materials composited to prepare the samples. Sample C-08 had higher b^* due to the color derived from the amaranth flour and no differences were observed in lightness (L^*). Thus, sample C-05 had the lowest lightness ($L = 45.51 \pm 0.12$), which could be due to the increased amount of sorghum flour and decreased value of finger millet flour proportions. The hue green (a^*) varied from 10.07 for C-04 to 13.55 for C-01. Lightness of ingredients plays an important role in bakery products due to consumer preferences.

Sensory qualities attributes of baked biscuit samples

The mean sensory scores of biscuit samples prepared from a composite flour blends at different level of ration as compared to the control (100% wheat flour)

Table 8. Physical dimensions and properties of biscuit samples

Samples	Physical Parameters									
	a_w	Color	Texture Force (N)	Profile Thickness (mm)	D(mm)	T(mm)	W (g)	SF (D/T)		
	L*	a*	b*							
C-00	0.31 ± 1.0 ^a	56.94 ± 0.1 ^a	10.19 ± 0.09 ^a	28.28 ± 0.4 ^a	5.50 ± 1.0 ^a	3.20 ± 1.0 ^a	62.00 ± 0.02 ^a	10.63 ± 0.14 ^a	11.12 ± 0.03 ^a	5.83 ± 0.10 ^a
C-01	0.28 ± 1.0 ^b	45.46 ± 0.7 ^b	13.55 ± 1.04 ^b	29.10 ± 1.1 ^a	4.00 ± 1.0 ^b	2.50 ± 1.0 ^b	56.82 ± 0.01 ^b	09.04 ± 0.02 ^b	11.41 ± 0.20 ^a	6.28 ± 0.21 ^b
C-02	0.34 ± 1.0 ^a	46.46 ± 0.3 ^b	12.72 ± 0.23 ^b	27.95 ± 0.6 ^{ab}	3.05 ± 1.0 ^c	3.30 ± 1.0 ^a	58.23 ± 0.12 ^b	09.54 ± 0.42 ^b	11.14 ± 0.12 ^a	6.10 ± 0.32 ^b
C-03	0.26 ± 1.0 ^c	47.77 ± 1.1 ^b	12.06 ± 1.45 ^b	26.94 ± 0.4 ^a	4.50 ± 1.0 ^b	5.01 ± 1.0 ^c	54.22 ± 0.41 ^b	09.11 ± 0.21 ^b	11.82 ± 0.02 ^a	5.95 ± 0.02 ^b
C-04	0.28 ± 1.0 ^b	53.16 ± 0.6 ^a	10.07 ± 0.02 ^a	28.81 ± 0.6 ^a	3.00 ± 1.0 ^c	5.00 ± 1.0 ^c	58.93 ± 0.2b	10.63 ± 0.01 ^a	11.81 ± 0.06 ^a	5.54 ± 0.04 ^b
C-05	0.28 ± 1.0 ^b	45.51 ± 0.1 ^b	12.75 ± 0.45 ^b	27.83 ± 0.2 ^{ab}	3.00 ± 1.0 ^c	4.40 ± 1.0 ^d	57.99 ± 0.15 ^b	09.35 ± 0.02 ^b	11.17 ± 0.04 ^a	6.20 ± 0.18 ^b
C-06	0.29 ± 1.0 ^b	48.62 ± 0.8 ^b	12.25 ± 0.68 ^b	26.74 ± 1.0 ^b	6.00 ± 1.0 ^a	3.0 ± 1.0a	51.48 ± 0.10 ^c	08.43 ± 0.05 ^c	11.47 ± 0.14 ^a	6.11 ± 0.05 ^b
C-07	0.25 ± 1.0 ^c	45.92 ± 0.1 ^b	10.56 ± 0.22 ^a	26.27 ± 0.8 ^b	4.00 ± 1.0 ^b	3.05 ± 1.0 ^a	59.83 ± 0.24 ^a	11.95 ± 0.14 ^a	11.14 ± 0.25 ^a	5.01 ± 0.14 ^a
C-08	0.26 ± 1.0 ^c	48.01 ± 1.2 ^b	12.50 ± 0.39 ^b	30.06 ± 1.1 ^c	4.00 ± 1.0 ^b	3.81 ± 1.0 ^a	58.71 ± 0.32 ^b	10.08 ± 0.06 ^b	11.62 ± 0.14 ^a	5.82 ± 0.02 ^b
C-09	0.29 ± 1.0 ^b	51.15 ± 1.2 ^{ab}	12.83 ± 0.57 ^b	29.81 ± 0.8 ^c	5.00 ± 1.0 ^{ab}	3.98 ± 1.0 ^d	59.88 ± 0.04 ^a	09.61 ± 0.05 ^b	11.87 ± 0.05 ^a	6.23 ± 0.07 ^b
C-10	0.28 ± 1.0 ^b	48.39 ± 0.2 ^{bc}	13.11 ± 1.0 ^d	26.86 ± 0.2 ^{ab}	6.00 ± 1.0 ^{cc}	4.40 ± 1.0 ^c	54.89 ± 0.08 ^b	10.74 ± 0.16 ^a	11.36 ± 0.02 ^a	5.11 ± 0.05 ^a

^aC-00: biscuit prepared from 100% wheat as a control and Samples coded with C-01 up to C-10, represents the biscuit samples prepared from a composite flour blends which was developed by using D-optimal Design as presented in Table 1.; L*: lightness; a*: greenness; b* yellowness.

^{a-d} All data are means of three replicates ± SD. Means with the same superscripts in a column do not differ significantly ($P < 0.05$).

Table 9. Sensory quality attributes evaluation of biscuit samples biscuit samples

Sample	Sensory Evaluation Parameters						Overall Accept.
	Appearance	Color	Crispiness	Taste	Flavor	Texture	
C-00	7.85 ± 1.45 ^a	7.80 ± 1.60 ^a	7.75 ± 1.11 ^a	7.20 ± 2.04 ^a	7.40 ± 1.50 ^a	7.90 ± 1.48 ^a	7.80 ± 1.67 ^a
C-01	6.90 ± 1.37 ^b	6.80 ± 1.67 ^b	6.70 ± 1.78 ^b	6.40 ± 1.56 ^b	5.60 ± 1.81 ^b	5.95 ± 1.84 ^b	6.45 ± 1.46 ^b
C-02	6.40 ± 1.71 ^b	6.40 ± 1.50 ^b	6.70 ± 1.41 ^b	6.20 ± 1.64 ^b	6.00 ± 1.58 ^c	6.30 ± 1.80 ^c	6.20 ± 1.31 ^b
C-03	5.80 ± 1.85 ^b	5.30 ± 1.83 ^c	6.50 ± 1.63 ^b	5.85 ± 2.10 ^c	5.20 ± 1.85 ^b	6.10 ± 1.68 ^b	5.85 ± 1.30 ^c
C-04	5.90 ± 1.71 ^b	5.75 ± 1.65 ^c	6.95 ± 1.31 ^b	6.10 ± 1.33 ^c	5.95 ± 1.35 ^c	5.95 ± 1.50 ^b	6.20 ± 1.28 ^b
C-05	6.50 ± 1.71 ^b	6.15 ± 1.03 ^b	6.85 ± 1.13 ^b	6.65 ± 1.49 ^b	6.20 ± 1.36 ^c	6.35 ± 1.46 ^c	6.30 ± 0.97 ^b
C-06	5.50 ± 1.14 ^b	5.25 ± 1.48 ^c	6.20 ± 1.60 ^c	5.70 ± 1.89 ^c	5.20 ± 1.54 ^b	5.90 ± 0.96 ^b	5.65 ± 1.53 ^c
C-07	5.80 ± 1.27 ^b	5.70 ± 1.86 ^c	6.60 ± 1.87 ^b	5.35 ± 1.75 ^c	5.10 ± 1.77 ^b	5.90 ± 1.07 ^b	5.41 ± 2.08 ^c
C-08	6.25 ± 1.74 ^a	6.25 ± 1.71 ^b	6.85 ± 1.26 ^b	6.10 ± 1.41 ^c	5.90 ± 1.58 ^b	5.80 ± 1.57 ^b	6.15 ± 1.26 ^b
C-09	7.05 ± 1.31 ^a	6.95 ± 1.05 ^b	6.90 ± 1.25 ^b	6.50 ± 1.23 ^b	6.15 ± 1.53 ^c	6.90 ± 1.33 ^c	6.65 ± 1.26 ^b
C-10	5.8 ± 1.73 ^b	5.90 ± 1.33 ^c	6.60 ± 1.39 ^b	5.55 ± 1.23 ^c	5.55 ± 1.53 ^b	6.00 ± 1.52 ^b	5.70 ± 1.26 ^c

^aC-00 stands for biscuit sample used as a control prepared from 100% wheat flour blends; Samples coded with C-01 up to C-10, represents the biscuit samples prepared from composite flour which was developed by using D-optimal Design as presented in Table 1.

^{a-c} All data are means of three replicates ± SD. Means with the same superscripts in a column do not differ significantly ($P < 0.05$).

are presented in Table 9. The statistical analysis of the data showed that the biscuit samples prepared from the composite flour blends, were significantly ($P < 0.05$) different from the control with the exception of C-09 for a comparably good sensory score with the control in appearance, color, crispness, texture and overall acceptability with a sensory score of 7.05, 6.95, 6.90, 6.90 and 6.65 respectively, and sample C-05 in terms of flavor with a sensory score of 6.20. However, there was no significant ($P > 0.05$) differences with respect to biscuit texture, appearance and crispness among the composite biscuit samples. It is evident from the results that the control had highest overall acceptability in sensory score followed by biscuit prepared from C-09 composite flour blends while, sample C-06 ranked the least in most of the sensory attributes, which is comparably in agreement with the results of Karki *et al.* (2016). The low rating recorded may be due to the low level of sorghum and finger millet flour which resulted in poor color and may affected the overall sensory attribute of the

biscuit. This shows that using gluten free cereals alone to prepare biscuit will have very low acceptability as compared to wheat. The low sensory score for texture, flavor and acceptability for the composite flour blend biscuits may possibly be improved by addition of non-gluten proteins, such as egg and milk protein or soybean protein or hydrocolloids and natural emulsifying agents that could mimic the viscoelastic properties of gluten (Alvarez-Jubete *et al.*, 2010; Lazaridou and Biliaderis, 2009; Renzettia *et al.*, 2008).

Conclusion

From the results, it is found that the incorporation of amaranthus flour improved the quality of composite flour in terms of increasing nutrient density, while there were reduced results in flours quality like development time, consistency and dough stability as compared to wheat flour which resulted from being gluten free. On the other hand there were improvements in pasting properties of the composite

flour like peak, trough and break down viscosity as there was an increased incorporation of sorghum and finger millet flours in the composite flours.

The reduced BDV and FQN in composite flour resulted in poor physical characteristics like texture and appearance in the formulated biscuit samples, which can possibly be improved using natural emulsifying and non-gluten proteins. The indicative optimal proportion of composite flours were amaranth flour 50%, sorghum 40%, and 10% finger millet flour; and at this proportion the biscuit had a comparably better sensory quality. Thus, these flours can be used in gluten-free biscuit formulations as replacement for wheat flour increasing the nutritional value with a slight depreciation in overall biscuits sensory acceptability.

Funding: "This research received no external funding"

Acknowledgments: Authors would like to acknowledge Melkas and adet agricultural research centres for providing sorghum and finger millet samples.

References

- AACC. (2000). Approved methods of the American Association of Cereal Chemist. *American Association of cereal Chemists Press, 10th Edn.* (St. Paul), MN.
- Abdelghafor, R. F., Mustafa, A. I., Ibrahim, A. M. H., Krishnan, P. G. (2011). Quality of Bread from Composite Flour of Sorghum and Hard White Winter Wheat. *Adv J Food Sci Technol*, 3(1), 9-15.
- Abu, J., Badifu, G., Akpapunan, M. (2006). Effect of crude palm-oil inclusion on some physico-chemical properties of gari, a fermented cassava food product. *J. Food Sci. Technol*, 24, 73-79.
- Adebawale, Y. A., Adeyemi, I. A., Oshodi, A. A. (2005). Functional and physicochemical properties of flours of six Mucuna species. *Afr. J. Biotechnol*, 4(12),
- Adeleke, R. O., Odedeji, J. O. (2010). Functional Properties of Wheat and Sweet Potato Flour Blends. *Pak. J. Nutr.*, 9(6), 535-538.
- Adeyemi, S. A. O., Ogazi, P. O. (1985). The place of plantain in composite flour. *Commerce industry. Lagos State, Nigeria. World Health Organization (WHO), Rep. Ser. 1973. No 522 Committee WHO Geneva.*
- Alvarez-Jubete, L., Auty, M., Arendt, E. K., Gallagher, E. (2010). Baking properties and microstructure of pseudocereal flours in gluten-free bread formulations. *Eur Food Res Technol*, 230, 435-445. <http://dx.doi.org/10.1007/s00217-009-1184-z>
- Amoo, A. R. N., Dufie, W.-M. F., Ibok., O. (2014). Physicochemical and pasting properties of starch extracted from four yam varieties. *J. Food Nutr. Sci.*, 2(6), 262-269. <https://doi.org/10.11648/j.jfns.20140206.14>
- Anonymous. (2016). *Crop Variety Register Plant Variety release, Protection and Seed Quality Control Directorate* (Vol. 19, pp. 330). Addis Ababa, Ethiopia: Ministry of Agriculture and Natural Resources.
- AOAC. (2000). *Official Methods of Food Analysis*, Association of Official Analytical Chemists. Washington, DC, USA, , 2000., 15th edition.
- Awolu, O. O., Oluwaferanmi, P. M., Fafowora, O. I., Oseyemi, G. F. (2015). Optimization of the extrusion process for the production of ready-to-eat snack from rice, cassava and kersting's groundnut composite flours. *LWT - Food Sci. Technol.*, 64, 18-24. <http://dx.doi.org/10.1016/j.lwt.2015.05.025>
- Belton, P. S., Taylor, J. R. N. (2002). *Pseudocereals and less Common Cereals: Grain Properties and Utilization Potential* (P. S. Belton & J. R. N. Taylor Eds. 1st ed.): Springer-Verlag Berlin Heidelberg New York, USA.
- Bourekoua, H., Benatallah, L., Zidoune, M. N., Rosell, C. M. (2016). Developing gluten free bakery improvers by hydrothermal treatment of rice and corn flours. *LWT - Food Sci. Technol.*, 73, 342-350. <http://dx.doi.org/10.1016/j.lwt.2016.06.032>
- Carcea, M., Acquistucci, R. (1997). Isolation and physicochemical characterization of fonio (*Digitaria exilis* Stapf) starch. *Starch/Stärke*, 49, 131-135. <http://dx.doi.org/10.1002/star.19970490403>
- Cornejo, F., Novillo, G., Villacrés, E., Rosell, C. M. (2019). Evaluation of the physicochemical and nutritional changes in two amaranth species (*Amaranthus quitensis* and *Amaranthus caudatus*) after germination. *Food Res.* <https://doi.org/10.1016/j.foodres.2019.01.022>
- Dautant, F. J., Simancas, K., Sandoval, A. J., Müller, A. J. (2007). Effect of temperature, moisture and lipid content on the rheological properties of rice flour. *J. Food Eng.*, 78, 1159-1166. doi: <https://doi.org/10.1016/j.jfoodeng.2005.12.028>
- Desai, A. D., Kulkarni, S. S., Sahoo, A. K., Ranveer, R. C., Dande, P. B. (2010). Effect of Supplementation of Malted Ragi Flour on the Nutritional and Sensorial Quality Characteristics of Cake. *Adv. J. Food Sci. Technol.*, 2(1), 67-71.
- Ezeocha, C. V., Okafor, J. C. (2016). Evaluation of the Chemical, Functional and Pasting Properties of Starch from Trifoliate Yam (*Dioscorea Dumetorum*) Landraces. *Eur. J. Adv. Res. Biol. Life Sci.*, 4(2).
- Gallagher, E., Arendt, E. K., Bello, F. D. (2008). Formulation and nutritional aspects of gluten-free cereal products and infant foods. In E. K. Arendt & F. D. Bello (Eds.), *Gluten-Free Cereal Products and Beverages* (pp. 322-346): Elsevier Inc.
- Haridas Rao, P., Malini Rao, H. (1991). Effect of incorporating wheat bran on the rheological characteristics and bread making quality of flour. *Int. Food Res. J.*, 28(2), 92-97.
- ICC. (2000). *Association of International Cereal Science and Technology*, Vienna, Austria.
- Kabuo, N. O., Alagbaoso, O. S., Omeire, G. C., Peter-Ikechukwu, A. I., Akajiaku, L. O., Obasi, A. C.

- (2018). Production and Evaluation of Biscuits from Cocoyam (Xanthosoma Sagittifolium Cv Okoriko)-Wheat Composite Flour. *J. Food Nutr. Res.*, 2(2), 53-61.
- Karki, R., Mishra, A., Ojha, P., Subedi, U. (2016). Comparative Study on the Sensory Quality of Prepared Biscuit and Cake from Amaranthus and Sorghum. *J. Food Sci. Techol. Nepal*, 9, 79-84.
- Labuza, P., Jones, K. A., Sinskey, A. J., Gomez, R., Wilson, S., Miller, B. (1972). Effects of drying conditions on cell viability and functional properties of single cell protein. *J. Food Sci.*, 37, 103-107. <https://doi.org/10.1111/j.1365-2621.1972.tb03396.x>
- Lazaridou, A., Biliaderis, C. G. (2009). Gluten-Free Doughs: Rheological Properties, Testing Procedures, Methods and Potential Problems. In E. Gallagher (Ed.), *Gluten-Free Food Science and Technology* (pp. 52-82). West Sussex, United Kingdom: Wiley-Blackwell Publishing Ltd.
- Lee, J. H., Cho, A.-R., Hong, J. Y., Park, D.-J., Lim, S.-T. (2012). Physical properties of wheat flour composites dry-coated with microparticulated soybean hulls and rice flour and their use for low-fat doughnut preparation. *J. Cereal Sci.*, 56, 636-643. <http://dx.doi.org/10.1016/j.jcs.2012.08.011>
- Manley, D. (2000). *Technology of Biscuits, Crackers and Cookies* (Third ed.). Cambridge CB1 6AH, England: CRC Press LLC.
- Miralbes, C. (2004). Quality control in the milling industry using near infrared transmittance spectroscopy. *Food Chem.*, 88, 621-628. <http://dx.doi.org/10.1016/j.foodchem.2004.05.004>
- Morris, C. F., King, G. E., Rubenthaler, G. L. (1997). Contribution of Wheat Flour Fractions to Peak Hot Paste Viscosity. *Cereal Chem.*, 74(2), 147-153.
- Muyonga, J. H., Nabakabya, D., Nakimbugwe, D. N., Masinde, D. (2008). Efforts to promote Amaranth production and consumption in Uganda to fight Malnutrition. In G. L. Robertson & J. R. Lupien (Eds.), *Using Food Science and Technology to Improve Nutrition and Promote National Development*: International Union of Food Science & Technology.
- Omobolanle, O., AnimashaunOluwatoyin, Michael, I., BamgboseAdefunke, AdedejiOlamiji. (2017). Evaluation of Potentials of some selected seeds' flours as partial Substitute for Wheat in Cookies production. *Intl. J. sci. eng. res.*, 8(3).
- Ragae, S., Abdel-Aal, E.-S. M. (2006). Pasting properties of starch and protein in selected cereals and quality of their food products. *Food Chem.*, 95, 9-18. <http://dx.doi.org/doi:10.1016/j.foodchem.2004.12.012>
- Renzettia, S., Belloa, F. D., Arendt, E. K. (2008). Microstructure, fundamental rheology and baking characteristics of batters and breads from different gluten-free flours treated with a microbial transglutaminase. *J. Cereal Sci.*, 48, 33-45. <http://dx.doi.org/10.1016/j.jcs.2007.07.011>
- Schoenlechner, Regine, Linsberger, G., Kaczyk, L., Berghofer, Emmerich. (2006). Production of short dough biscuits from the pseudocereals amaranth, quinoa and buckwheat with common bean. *Ernährung ER*, 30, 101-107.
- Shittu, T. A., Raji, A. O., Sanni, L. O. (2007). Bread from composite cassava-wheat flour: I. Effect of baking time and temperature on some physical properties of bread loaf. *Food Res.*, 40, 280-290. <http://dx.doi.org/doi:10.1016/j.foodres.2006.10.012>
- Sousa, C., Moreno, M. d. L., Comino, I. (2014). Alternative Grains as Potential Raw Material for GlutenFree Food Development in The Diet of Celiac and GlutenSensitive Patients. *Austin Journal of Nutrition and Food Sciences*, 2(3).
- Sulieman, A. A., Zhua, K.-X., Peng, W., Hassan, H. A., Obadi, M., Siddeeg, A., Zhou, H.-M. (2019). Rheological and quality characteristics of composite gluten-free dough and biscuits supplemented with fermented and unfermented Agaricus bisporus polysaccharide flour. *Food Chem.*, 271, 193-203. <https://doi.org/10.1016/j.foodchem.2018.07.189>
- Suma, F., Urooj, A., MR, A., Rajiv, J. (2014). Sensory, Physical and Nutritional Qualities of Cookies Prepared from Pearl Millet (Pennisetum Typhoideum). *J. Food Process. Technol.*, 5(10). <https://doi.org/10.4172/2157-7110.1000377>
- Taiwo, E. O., Sekinat, A. A., Adegbola, D. O., Kemisola, A. A., Joke, S. A. (2017). Chemical composition and sensory qualities of wheat-sorghum date cookies. *Food Technol. Biotechnol. Nur.*, 12(1-2), 71-76.
- Thorat, S. S., Ramachandran, P. (2016). Effect of Finger Millet Flour on Rheological Properties of Wheat Dough for the Preparation of Bread. *Int J Food Sci Nutr* 5(4).
- Tsehay, Y., Berg, T., Tsegaye, B., Tanto, T. (2006). Farmers' management of finger millet (Eleusine coracana L.) diversity in Tigray, Ethiopia and implications for on-farm conservation. *Biodivers. Conserv.*, 15, 4289-4308. <https://doi.org/10.1007/s10531-005-3581-3>
- Vijayakumar, P. T., Mohankumar, J. B. (2009). Formulation and characterization of Millet flour blend incorporated composite flour. *Int. J. Agric. Sci.*, 1(2), 46-54.
- Vizitiu, D., Ognean, M., Danciu, I. (2012). Rheological Evaluation of Some Laboratory Mills. *Bulletin UASVM Agriculture*, 69(2).